




VP Power Inserter

Item no. 83062047

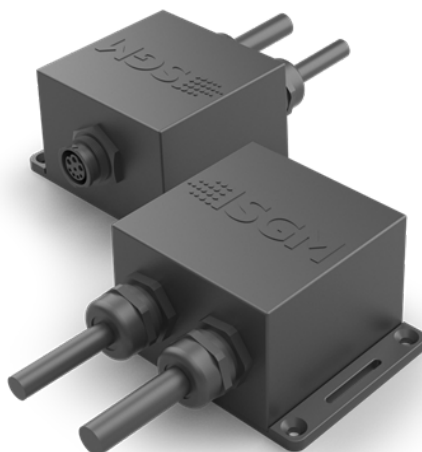

Description

The VP Power Inserter is designed to insert power to an additional daisy chain of VPL units, when long extension cables or extra fixtures are needed.

The VP Data Redundancy Interface is a waterproof / dustproof connection box with a VP cable ending in a VP male connector, a VP female chassis connector, and a mains power cable with bare ends. This item must be installed after the last VP fixture in the cabled string and before a new cabled string of VP units.

Features and benefits

- ✓ Intended for extra power insertion in VP installations
- ✓ Waterproof / Dustproof

Certifications & classifications



RoHS

IP66



Specification

Physical	Net dimensions	104 x 54 x 77 mm
	Net dimensions inches	4.1 x 2.1 x 3 inches
Electrical	AC Power, nominal	200 - 240V 50/60Hz
Connections	Data / Power input	5 meter cable with 8 pin X-Lok connector IP68
	Data / Power output	8 pin X-Lok connector IP68
	Power	Power cable 1 meter with bare ends
Thermal	Temperature range, Operating	-20°C to 60°C
	Temperature range, Start-up	-20°C to 60°C
	Temperature range, Storage	-40°C to 80°C

NOTES:

Due to continuous improvements and innovations, specifications may change without notice.

LEDs' expected lifetime provided by manufacturer and obtained under manufacturer's test conditions.

Zoom range defined as a minimum beam angle to a maximum field angle.

Photometric measurements obtained with Goniometer Scan / SGM Illumination Lab 1.6.0.0.

Lumen output in pixel products is calculated.

Ordering information

Qty	Product name	Item number
	Accessories	Item number



SGM Light A/S

Headquarter [+45 70 20 74 00](tel:+4570207400)

Mail info@sgmlight.com

Website sgmlight.com