




VP Power + Data Joiner

Item no. 83062046

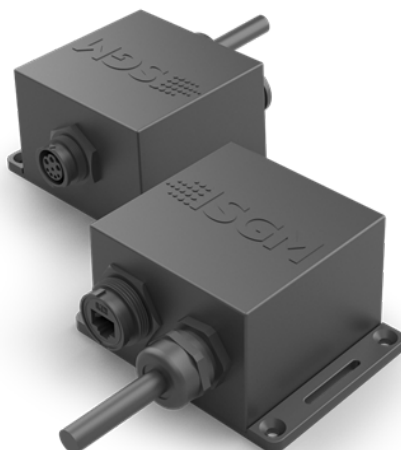

Description

The VP Power + Data Joiner is designed to join power and data for a daisy chain of VP fixtures. One VP Power + Data Joiner can send power and data to no less than 65 VPL 1220-20 units.

The VP Power + Data Joiner is a waterproof / dustproof connection box with a VP female chassis connector, a power cable with bare ends, and a RJ45 chassis connector. This item must be installed before the first VP fixture in the cabled string and before the circuit breaker (for power) and VP Processor (for data). SGM always recommends to install a 10amp type B circuit breaker for each string of cabled VPL luminaires.

Features and benefits

- ✓ Intended to join power and data in one single VP cable
- ✓ Waterproof / Dustproof

Certifications & classifications

CE

RoHS

IP66



Specification

Physical	Net dimensions	104 x 54 x 77 mm
	Net dimensions inches	4.1 x 2.1 x 3 inches
Electrical	AC Power, nominal	200 - 240V 50/60Hz
Connections	Data / Power input	RJ45 connector IP67
	Data / Power output	8 pin X-Lok connector IP68
	Power	Power cable 1 meter with bare ends
Thermal	Temperature range, Operating	-20°C to 60°C
	Temperature range, Start-up	-20°C to 60°C
	Temperature range, Storage	-40°C to 80°C

NOTES:

Due to continuous improvements and innovations, specifications may change without notice.

LEDs' expected lifetime provided by manufacturer and obtained under manufacturer's test conditions.

Zoom range defined as a minimum beam angle to a maximum field angle.

Photometric measurements obtained with Goniometer Scan / SGM Illumination Lab 1.6.0.0.

Lumen output in pixel products is calculated.

Ordering information

Qty	Product name	Item number
☐		
	Accessories	Item number
☐	Waterproof RJ-45 Kit	83062057
☐		



SGM Light A/S

Headquarter [+45 70 20 74 00](tel:+4570207400)

Mail info@sgmlight.com

Website sgmlight.com