



G-4 Wash POI

Micro-Fresnel LED light



TruColor™



ThermalDrive™



DryTech™

Description

The G-4 Wash POI is a lightweight and compact fresnel projector, capable of outstanding color rendering and remarkable output. The optical system is designed to deliver a staggering brightness for a fixture with such a small footprint and a perfect color mix with a completely even field and no hotspots. Because of its wide zoom range, qualified color reproduction, accurate color temperature control, and low power consumption, the G-4 Wash POI is a very flexible moving light suitable for any application.

Features and benefits

- ✓ High-power LED Fresnel Wash projector with best-in-class color rendering index
- ✓ Accurate zoom range from 9° beam angle to 76° field angle
- ✓ Flicker-free / programmable scenes / continuous pan movement / DMX, RDM, and wireless control
- ✓ Corrosion class C5-M (marine) makes it ideal for coastal and offshore installations
- ✓ 2000K - 10000K CTC linear control with superb color mixing based on Red, Green, Blue, Amber, and Mint LEDs
- ✓ Ideal for medium sized installations such as entrance features, signage, landscapes, cruises, and beaches
- ✓ 5-year warranty
- ✓ IP66-rated and patented built-in dehumidifier for a practically maintenance-free luminaire






Certifications & classifications

IP66

RoHS

CE




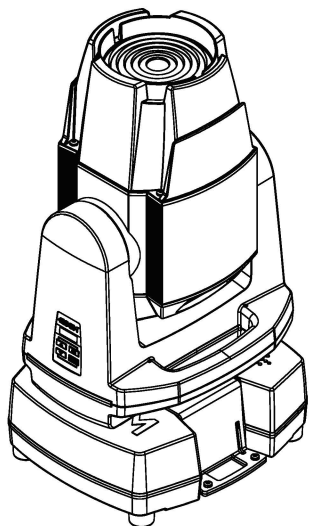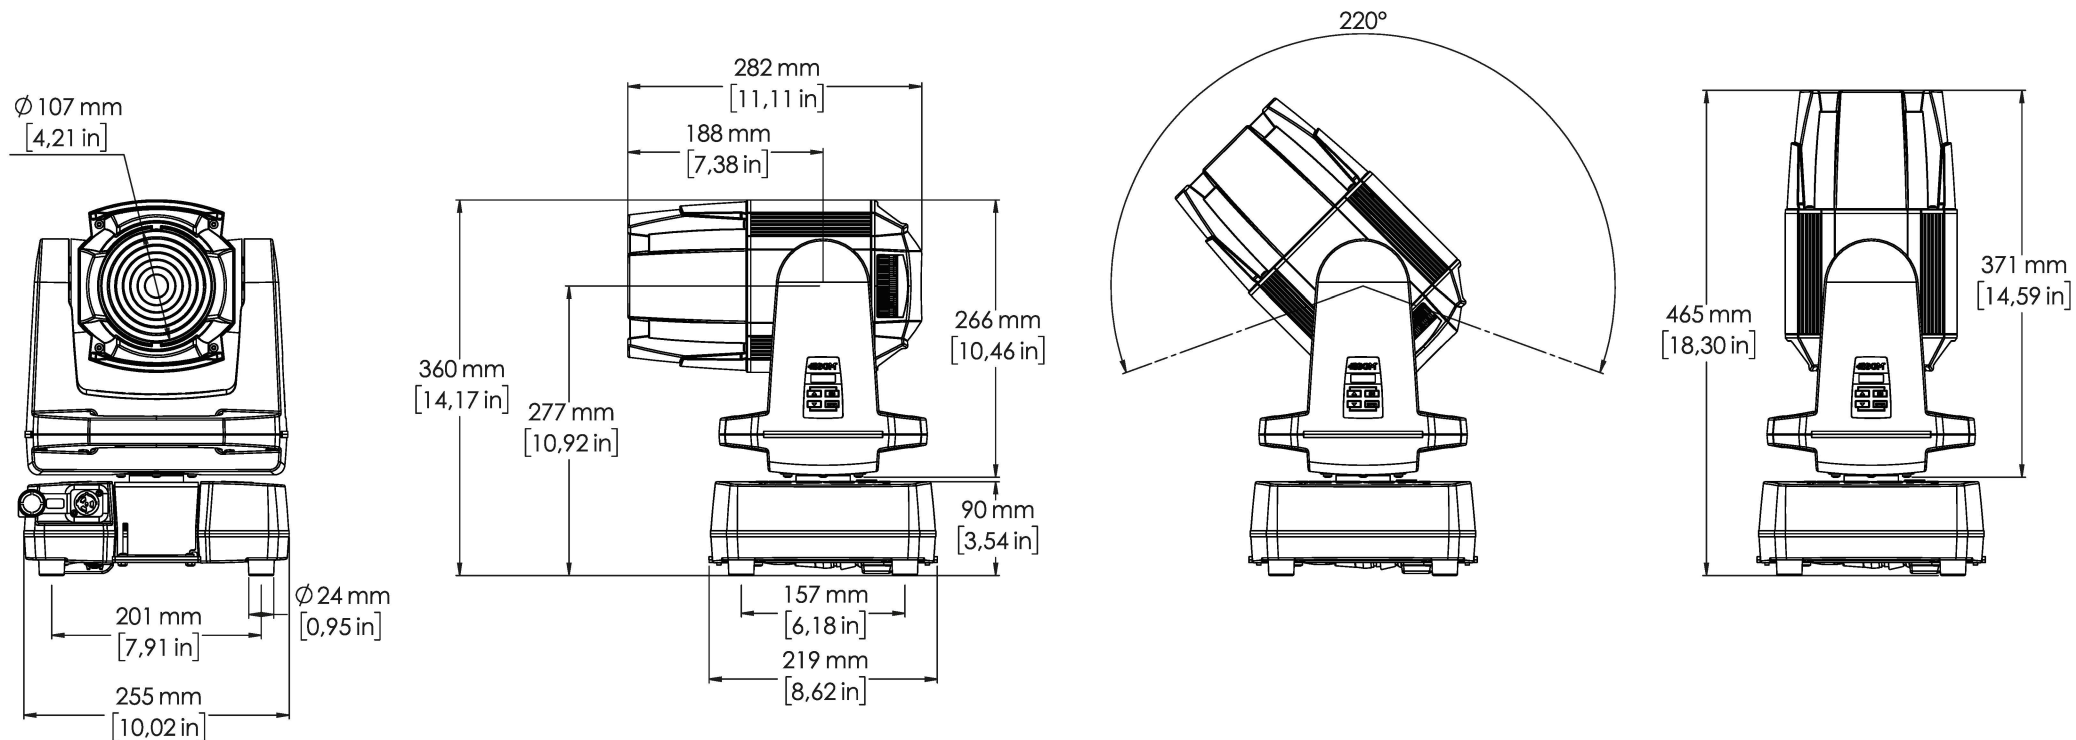


Manufacturer	SGM
Luminaire	G-4 Wash max All on raw peak
Measurement Date	24-09-2017
Power Consumption	197 W
Light Output	5 244 lm
Field Angle	82.9 deg
Beam Angle	55.9 deg
CRI	90
Color Temperature	6 359 K




Lux Diagram

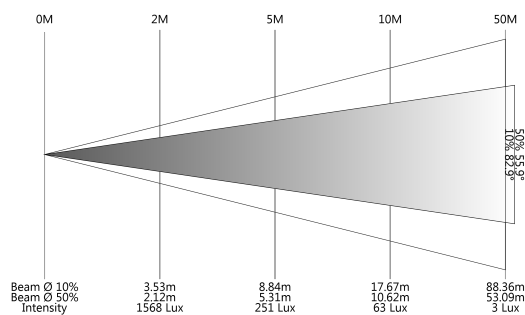


Polar Distribution

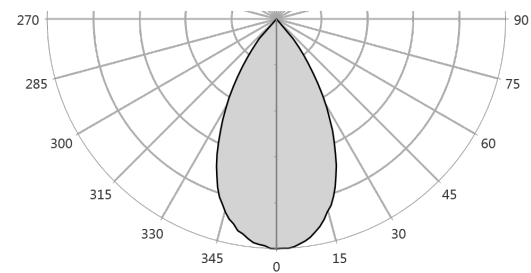

Beam Profile

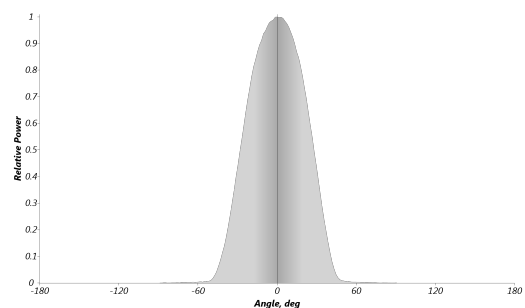

Spectral Distribution

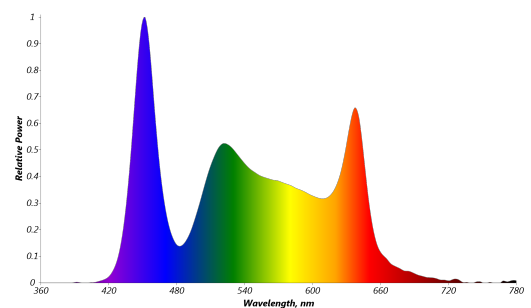

Specification

Optical Data	Fresnel lens diameter	112 mm
	LED expected lifetime	50,000 hours
	Lightsource	5 color 150 W
	Zoom	Motorized
	Zoom range	9° to 76°
Photometric	Color temperature range	2000K - 10000K
	CQS typical	91
	CRI @ 3200K	94
	CRI @ 5600K	92
	CRI typical	92
	Efficacy	37 lm/W
	Light output all LEDs on	7265 lm
	Light output blue	264 lm
	Light output green	1103 lm
	Light output red	524 lm
	Lux @ 10m	757 lux
	Lux @ 3m	7720 lux
	Lux @ 5m	3027 lux
	Maximum Beam Angle	52 °
	Maximum Field Angle	78 °
	Minimum Beam Angle	9 °
	Minimum Field Angle	20 °
	RF typical (TM-30-15)	89
	TLCI @ 3200K	87
	TLCI @ 5600K	93
	TLCI typical	90
Physical	Color options	Black - RAL 9004 Custom color - Any RAL White - RAL 9010
	Corrosion class	C5-M (ISO 12944)
	IP class	IP66
	Lens material	Tempered glass front
	Material	Aluminium PC/ASA Plastic Rubber Steel
	Net dimensions	219 x 465 x 255 mm
	Net dimensions inches	8.6 x 18.3 x 10 inches

	Net weight	10 kg (22.1 lbs)
Features	Dehumidifier	Head
	Dimming	Electronic
	Emulation mode / effect	Color Filter Emulation
	Pan	Endless
	Pan modes	360° 360° Shortest path 540° Continues CCW Continues CW Endless
	Power / DMX indicator	Head
	Strobe	Ultra-high-speed strobe effects
	Tilt	220°
Electrical	AC power, max.	90 - 264V 50/60Hz
	AC Power, nominal	100 - 240V 50/60Hz
	Electrical Protection	Overload protection with automatic recover
	Max Inrush Current 230VAC	40 A
	Max power consumption	250 W
	Power Supply Unit	Auto-ranging electronic switch-mode
	Standby power consumption	18 W
	Typical power consumption	200 W
Programming and Control	16-bit control	Dimmer, colors, pan/tilt
	DMX channels	18
	DMX modes	1
	Protocol	USITT DMX512A RDM ANSI E1.20
	Setting and addressing	RDM ANSI E1.20
Connections	DMX data in/out	5 meter cable for DMX in and out
	Power	Power cable 5 meter with bare ends
Installation	Mounting point	2 M-10 locking points (suitable for one optional POI Omega bracket)
	Orientation	Any
	Rigging possibilities	Hanging / horizontal mounted or ceiling / wall mount (optional)
	Safety features	2 attachment points for safety wire Minimum distance to combustible materials: 0.3 meter (11 in).

Thermal	Cooling	Active, Forced Air, Temperature-regulated
	Humidity (max.)	98 %
	Temperature range, Operating	-40°C to 50°C
	Temperature range, Start-up	-20°C to 50°C
	Temperature range, Storage	-40°C to 80°C
	Thermal Protection	Automatic overtemperature protection

Included items	Included items	Safety instructions and installation quick guide 2 M-10 screws
-----------------------	----------------	---

Conforms To	CE - 2014/30/EU: EMC Directive	EN 55103-2 EN 55015 EN 61547 EN 61000-3-2 EN 61000-3-3 EN 55032
	CE - 2014/35/EU: Low Voltage Directive	EN 60598-1 EN 60598-2-17 EN 62471 EN 60529

NOTES:

Due to continuous improvements and innovations, specifications may change without notice.

LEDs' expected lifetime provided by manufacturer and obtained under manufacturer's test conditions.

Zoom range defined as a minimum beam angle to a maximum field angle.

Photometric measurements obtained with Goniometer Scan / SGM Illumination Lab 1.6.0.0.

Lumen output in pixel products is calculated.

Ordering information

Qty	Product name	Item number
☐	G-4 Wash, POI, BL	80101401
☐	G-4 Wash, POI, BL, Ceiling mount	80101402
☐	G-4 Wash, POI, WH	80101501
☐	G-4 Wash, POI, CU	80101601
☐		
Accessories		Item number
☐	SGM USB uploader cable	83062011
☐	Vacuum Test Kit	83061136
☐	G-4 Wash/S-4 Fresnel Top Hat	83061150
☐	RDM Addressing Tool	
☐		



SGM Light A/S

Headquarter [+45 70 20 74 00](tel:+4570207400)

Mail info@sgmlight.com

Website sgmlight.com