



G·4 Wash-Beam

Micro-Fresnel LED wash-beam light



TruColor™



ThermalDrive™



DryTech™

Description

The G-4 Wash-Beam is a fast and compact wash moving light capable of outstanding color rendering and a sharp defined beam angle. The optical system is designed to deliver a high-quality color mix with an accurate and precise beam of light. Because of its remarkable output, wide zoom range, qualified color reproduction, accurate color temperature control, and low power consumption, the G-4 Wash-Beam is a very flexible moving light suitable for any application.

Features and benefits









- ✓ High-power IP65 LED Wash-Beam moving head
- ✓ Best-in-class color rendering index: TLCI > 90, CRI > 92, CQS > 91, Rf > 89
- ✓ 2000K - 10000K CTC linear control with optimized color rendering
- ✓ Flicker-free / programmable scenes / continuous pan movement
- ✓ Superb color mixing based on Red, Green, Blue, Amber, and Mint LEDs
- ✓ Accurate zoom range from 4.8° beam angle to 34° field angle
- ✓ DMX, RDM, and wireless control
- ✓ Practically maintenance-free and silent performance

Certifications & classifications

IP65

RoHS




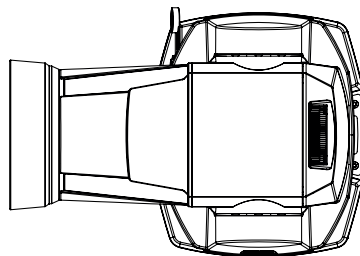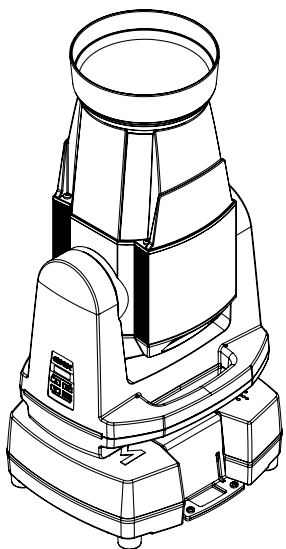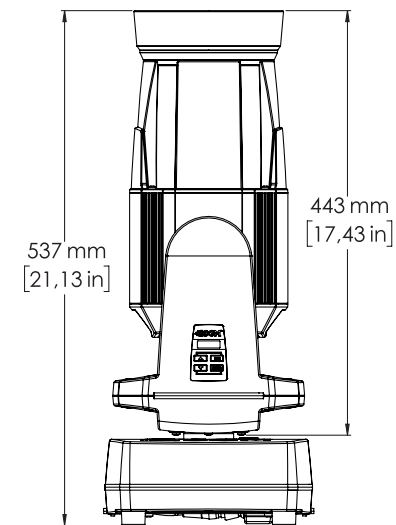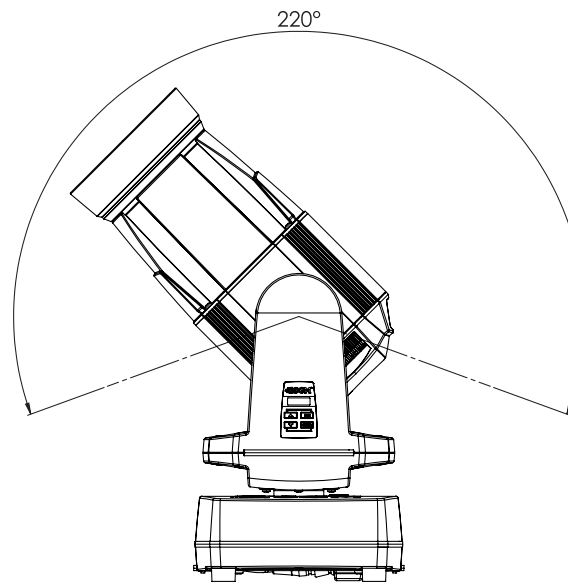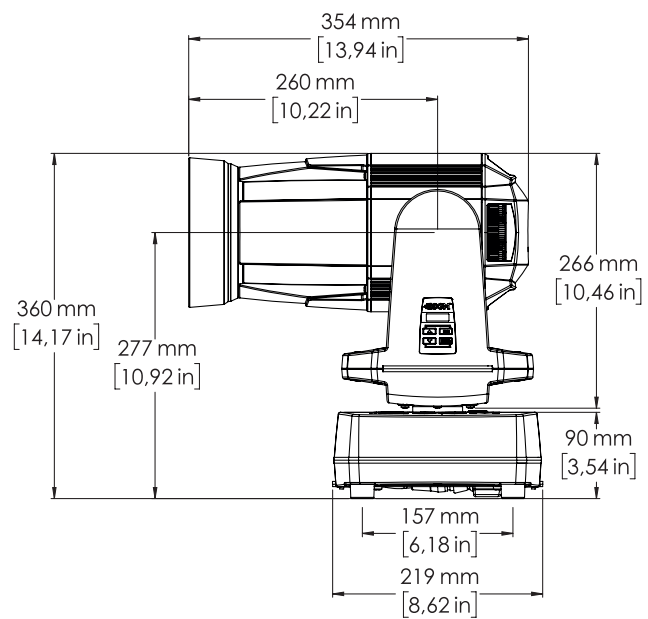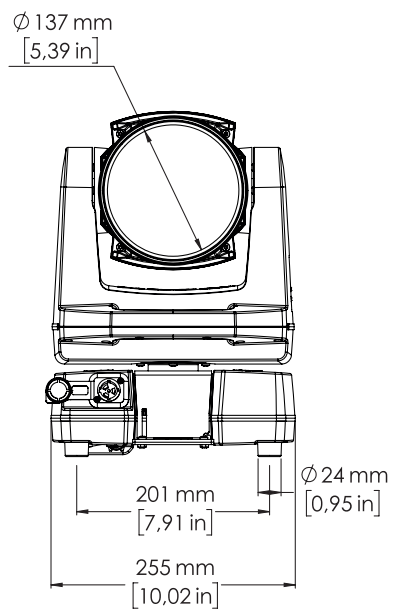


Manufacturer	SGM
Luminaire	G-4 Wash Beam med 12deg All on raw peak
Measurement Date	23-01-2018
Power Consumption	207 W
Light Output	5 738 lm
Field Angle	18.0 deg
Beam Angle	12.2 deg
CRI	90
Color Temperature	6 720 K




Lux Diagram

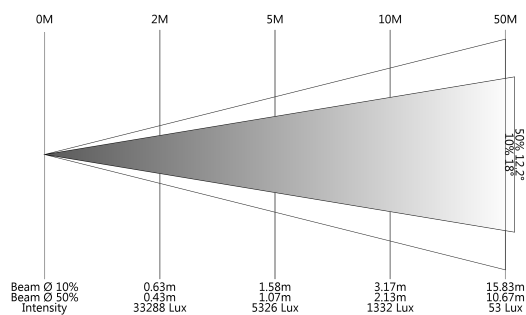


Polar Distribution

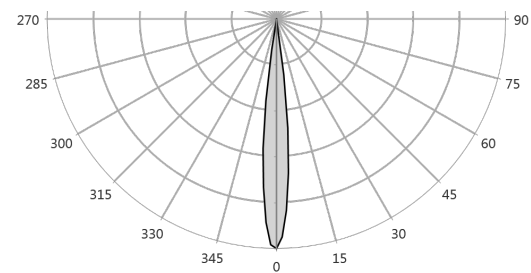

Beam Profile

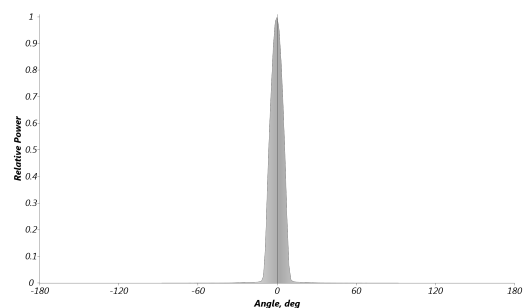

Spectral Distribution

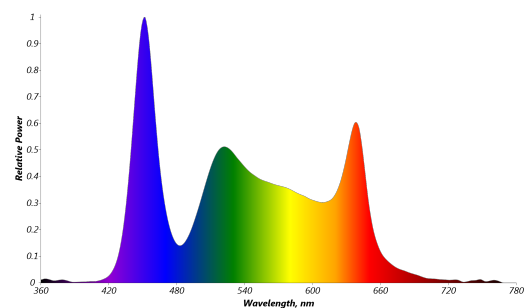

Specification

Optical Data	LED expected lifetime	50,000 hours
	Lens diameter	136 mm
	Lightsource	5 color 150 W
	Zoom	Motorized
	Zoom range	4.8° to 34°
Photometric	Color temperature range	2000K - 10000K
	CQS typical	91
	CRI @ 3200K	94
	CRI @ 5600K	92
	CRI typical	92
	Efficacy	27.7 lm/W
	Light output all LEDs on	5738 lm
	Lux @ 10m	2047 lux
	Lux @ 3m	22740 lux
	Lux @ 5m	8190 lux
	Maximum Beam Angle	30 °
	Maximum Field Angle	34 °
	Minimum Beam Angle	4 °
	Minimum Field Angle	7 °
	RF typical (TM-30-15)	89
	TLCI @ 3200K	87
	TLCI @ 5600K	93
	TLCI typical	90
Physical	Color options	Black - RAL 9004 Custom color - Any RAL White - RAL 9010
	IP class	IP65
	Material	Aluminium PC/ASA Plastic Rubber Steel
	Net dimensions	219 x 537 x 255 mm
	Net dimensions inches	8.6 x 21.2 x 10 inches
	Net weight	10 kg (22.1 lbs)
Features	Dehumidifier	Head
	Dimming	Electronic

	Emulation mode / effect	Color Filter Emulation
	Pan	Endless
	Pan modes	360° 360° Shortest path 540° Continues CCW Continues CW Endless
	Strobe	Ultra-high-speed strobe effects
	Tilt	220°
	Variable aperture	Optimized Beam Narrow / Optimized Beam Wide
Electrical	AC power, max.	90 - 264V 50/60Hz
	AC Power, nominal	100 - 240V 50/60Hz
	Electrical Protection	Overload protection with automatic recover
	Max Inrush Current 230VAC	40 A
	Max power consumption	250 W
	Power Supply Unit	Auto-ranging electronic switch-mode
	Standby power consumption	18 W
	Typical power consumption	200 W
Programming and Control	16-bit control	Dimmer, colors, pan/tilt
	Cabled DMX	5 pin XLR input/output
	DMX channels	18
	DMX modes	1
	Protocol	CRMX, W-DMX™ G2, W-DMX™ G3, W-DMX™ G4, W-DMX™ G4S USITT DMX512A RDM ANSI E1.20
	Setting and addressing	Control panel RDM ANSI E1.20
	Standalone mode	8 Internal Standalone Programs 9 Internal Pan/Tilt Presets
	Wireless DMX	Lumen Radio with RDM
Connections	DMX data in/out	IP65 XLR 5-pin cable, 0,2 m (7.8 in) IP65 XLR 5-pin connector, Male
	Power	Power input connector
Installation	Mounting point	2 quarter-turn locking points for one Omega bracket
	Orientation	Any
	Rigging possibilities	Hanging (Omega Bracket included) or ceiling/wall mount (optional)
	Safety features	2 attachment points for safety wire

		Minimum distance to combustible materials: 0.3 meter (11 in).
Thermal	Cooling	Active, Forced Air, Temperature-regulated
	Humidity (max.)	98 %
	Temperature range, Operating	-40°C to 50°C
	Temperature range, Start-up	-20°C to 50°C
	Temperature range, Storage	-40°C to 80°C
	Thermal Protection	Automatic overtemperature protection
Included items	Included items	2 m power cable 1 Omega bracket with quater-turn fasteners
Conforms To	CE - 2014/30/EU: EMC Directive	EN 55103-2 EN 55015 EN 61547 EN 61000-3-2 EN 61000-3-3 EN 55032
	CE - 2014/35/EU: Low Voltage Directive	EN 60598-1 EN 60598-2-17 EN 62471 EN 60529
	RoHS2 Directive	2011/65/EU
	UL	UL Std. 1573
Certified To	CSA	CSA Std. C22.2 No. 166

NOTES:

Due to continuous improvements and innovations, specifications may change without notice.

LEDs' expected lifetime provided by manufacturer and obtained under manufacturer's test conditions.

Zoom range defined as a minimum beam angle to a maximum field angle.

Photometric measurements obtained with Goniometer Scan / SGM Illumination Lab 1.6.0.0.

Lumen output in pixel products is calculated.

Ordering information

Qty	Product name	Item number
☐	G-4 Wash-Beam, Std, WH	80102101
☐	G-4 Wash-Beam, Std, BL	80101901
☐	G-4 Wash-Beam, Std, BL, Ceiling mount	80101902
☐		
Accessories		Item number
☐	G-4 Wash Front Lens Kit	83061409
☐	Omega Bracket with 1/4-turn fasteners	83060602
☐	Flight Case for 4 pcs of G-4	82051011
☐	Power cable with IP connector	07860275
☐	SGM USB uploader cable	83062011
☐	Vacuum Test Kit	83061136
☐	A-4	80070217
☐	4-way Motorized Barndoors for G-4, S-4	83061166
☐	RDM Addressing Tool	
☐		



SGM Light A/S

Headquarter +45 70 20 74 00

Mail info@sgmlight.com

Website sgmlight.com